


I50 LINEAR PLASTER IN

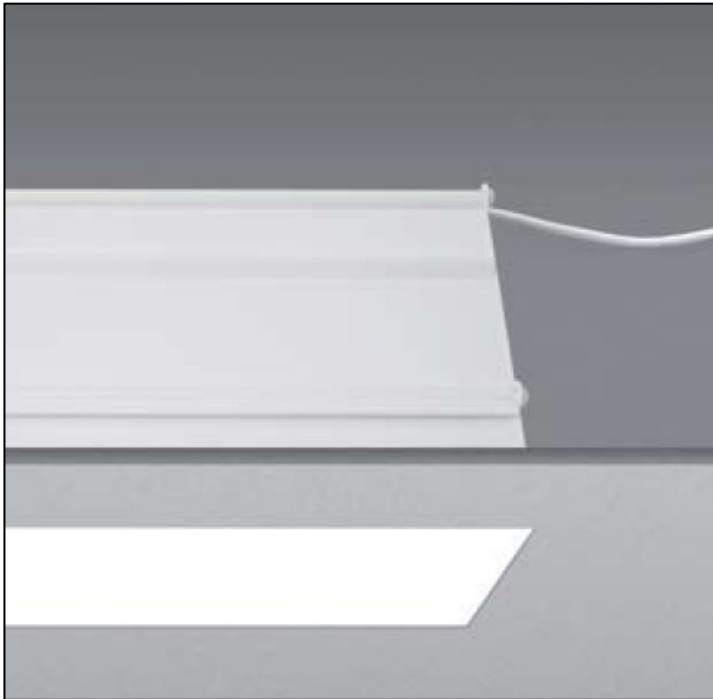

General Information:

A ceiling recessed luminaire, ideal for general lighting. A discreet fitting plastered directly into the ceiling, suitable for all interior applications.

The fitting is supplied with a glass diffuser that sits flush with the ceiling.

Length Options:


- 600mm (2 x 14w)
- 900mm (2 x 21w)
- 1200mm (2 x 28w)
- 1500mm (2 x 35w)
- 1800mm (4 x 21w)
- 2400mm (4 x 28w)
- 3000mm (4 x 35w)
- Made to measure – please call Light IQ for details

Lamp Options:


- 230v, 2 x 14-35w G5 Fluorescent (T5)
- 230v, 4 x 21-35w G5 Fluorescent (T5)

Ballast Options:

- Non dimmable
- Dimmable I-10v
- Dimmable DSI
- Dimmable DALI



Dimensions:

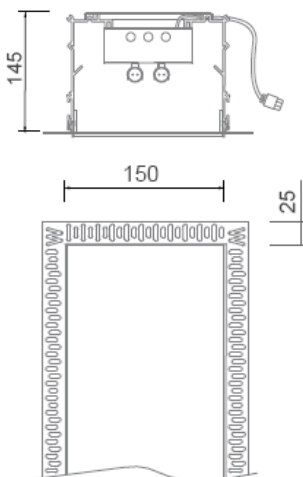

Length: Cut out:

- 600mm – 620 x 170mm
- 900mm – 920 x 170mm
- 1200mm – 1220 x 170mm
- 1500mm – 1520 x 170mm
- 1800mm – 1820 x 170mm
- 2400mm – 2420 x 170mm
- 3000mm – 3020 x 170mm

Please note that these drawings are not to scale

LAMP NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.

