

BASIC 35 SHOWERLIGHT FIXED FR



General Information:

A fixed recessed downlight with an integrated intumescent material which completely seals the fitting and cut-out in the event of a fire. Suitable for 30 and 60 minute fire rated ceilings. Ideal for 'wet areas' such as showers, bathrooms and external canopies.

Fire rating tested to BS476 Part 21. Tested to BS EN ISO 140-3:1995 & BS EN ISO 140-6:1998 (Acoustics) confirming that they maintain the ability for an internal or separating floor to provide sound insulation.

Suitable for use in bathroom zones 1 and 2.

Lamp:


12v, 20-35w GU4 Dichroic

Finishes:


Polished Brass
Polished Chrome
Satin Nickel
Satin Silver
White

Accessories:

Transformer



Dimensions:

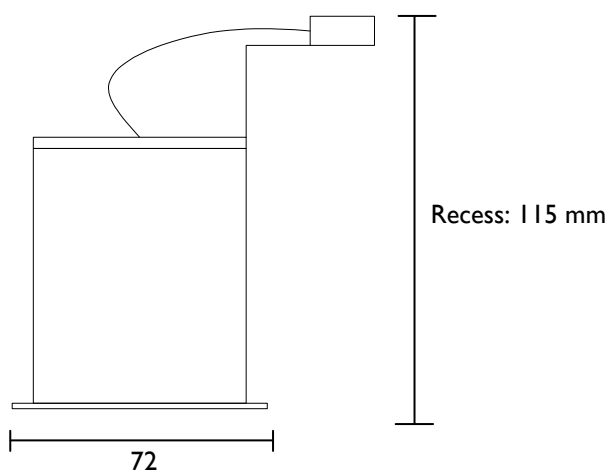

Cut out: 55mm Ø

Please note that these drawings are not to scale

LAMP AND TRANSFORMER NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.

