

BASIC 50 ADJ. FR

General Information:

A recessed directional downlight with an integrated intumescent material which completely seals the fitting and cut-out in the event of a fire. Suitable for 30 and 60 minute fire rated ceilings.

Fire rating tested to BS476 Part 21. Tested to BS EN ISO 140-3:1995 & BS EN ISO 140-6:1998 (Acoustics) confirming that they maintain the ability for an internal or separating floor to provide sound insulation.

Lamp Options:


- 12v, 20-50w GU5.3 Dichroic
- 230v, 35-50w GU10 Aluminium Reflector

Finishes:


- Polished Brass
- Polished Chrome
- Satin Nickel
- Satin Silver
- White

Accessories:

- Transformer

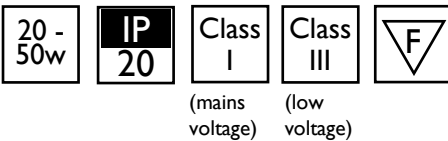

Dimensions:

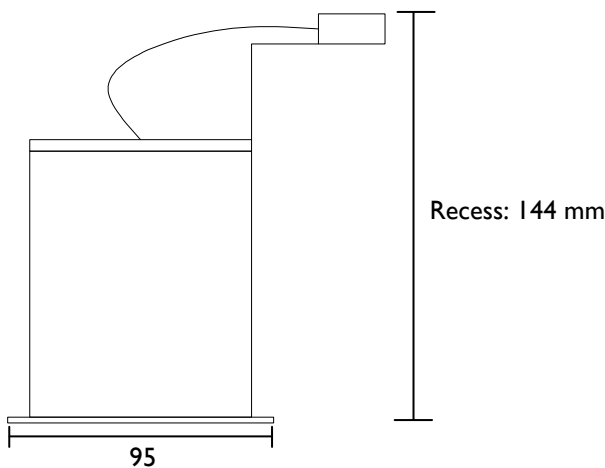

Cut out: 85mm Ø

Please note that these drawings are not to scale

LAMP AND TRANSFORMER NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.