



BASIC 50 SHOWERLIGHT FIXED FR

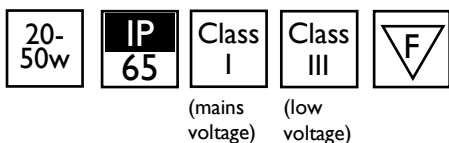

Dimensions:

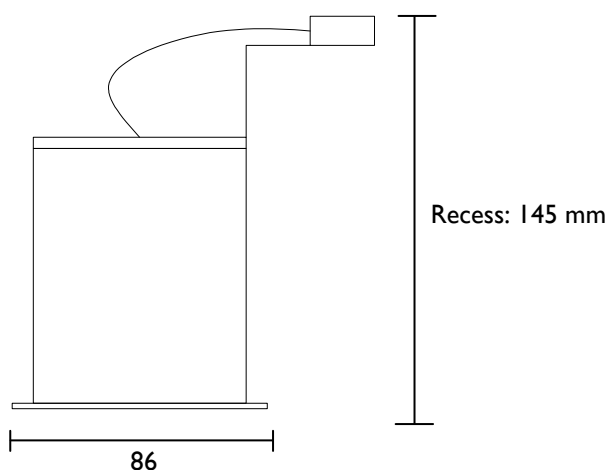

Cut out: 72mm Ø

Please note that these drawings are not to scale

LAMP AND TRANSFORMER NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.

General Information:

A fixed recessed downlight with an integrated intumescent material which completely seals the fitting and cut-out in the event of a fire. Suitable for 30 and 60 minutes fire rated ceilings. Ideal for 'wet areas' such as showers, bathrooms and external canopies.

Fire rating tested to BS476 Part 21. Tested to BS EN ISO 140-3:1995 & BS EN ISO 140-6:1998 (Acoustics) confirming that they maintain the ability for an internal or separating floor to provide sound insulation.

Suitable for use in bathroom zone 1 and 2.

Lamp Options:

- 12v, 20-50w GU5.3 Dichroic
- 230v, 35-50w GU10 Aluminium Reflector

Finishes:

- Polished Brass
- Polished Chrome
- Satin Nickel
- Satin Silver
- White

Accessories:

- Transformer

