

CONNECT-A

General Information:

An indirect surface mounted luminaire, suitable for either horizontal or vertical mounting on walls.

Length Options:

600mm (14w or 24w)
1200mm (28w or 54w)

Lamp:

230v, 2 x 24-54w G5 High Output Fluorescent (T5)
230v, 2 x 14-28w G5 High Efficiency Fluorescent (T5)

Ballast Options:


Dimmable (1200mm only)
Non dimmable

Finish:

Aluminium anodised



Dimensions:

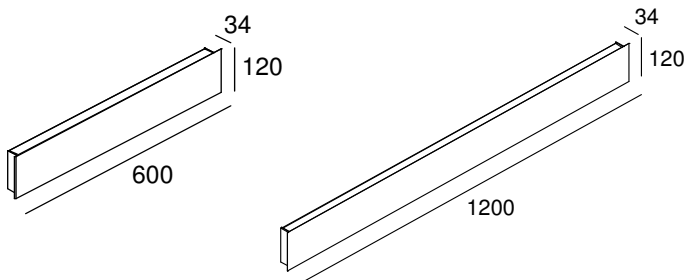

Please note that these drawings are not to scale

LAMPS NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.

