

General Information:

A recessed upright with a low surface temperature. The lamp sits below an anti-glare baffle for visual comfort.

The fitting has a sealed front and open back for ventilation into the void.

Fitting is suitable for indoor use only. A shallow version is also available.

Lamp:


12v, 20-50w GU5.3 Dichroic

Finishes:


Stainless Steel	<input type="checkbox"/>	White	<input type="checkbox"/>
Polished Stainless steel	<input type="checkbox"/>	Black	<input type="checkbox"/>
Bead Blasted Stainless steel	<input type="checkbox"/>	Antique Bronze	<input type="checkbox"/>
Polished Nickel	<input type="checkbox"/>	Paint to spec.	<input type="checkbox"/>
Matt Nickel	<input type="checkbox"/>		

Accessories:

Transformer	<input type="checkbox"/>
Carpet sleeve	<input type="checkbox"/>
Buriable Box Deep	<input type="checkbox"/>
Buriable Box shallow	<input type="checkbox"/>



Dimensions:

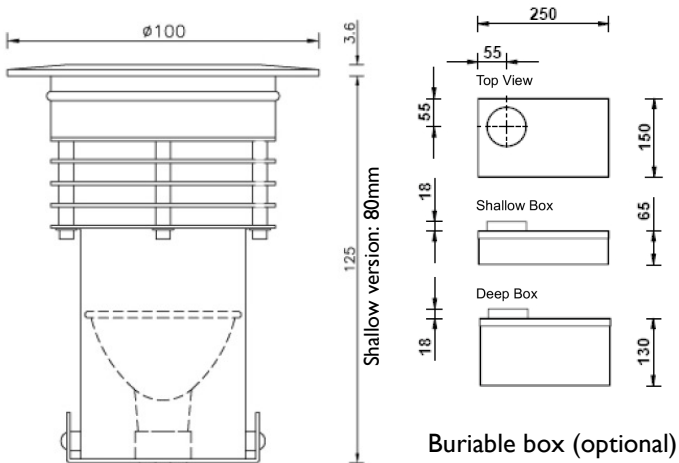

Cut out: 76mm Ø
 Recess Depth: 140mm
 Recess Depth Shallow version: 100mm

Please note that these drawings are not to scale

LAMP AND TRANSFORMER NOT INCLUDED.

CAUTION: Care should be taken with positioning of the light fitting as it will become hot in operation.

