




### Dimensions:

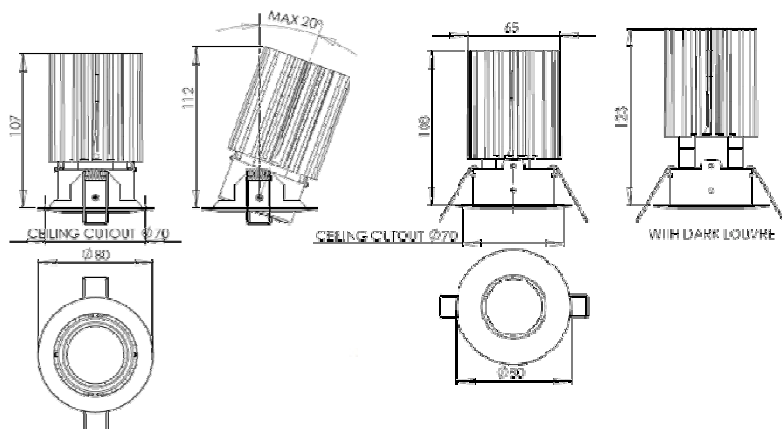

**ADJUSTABLE**  
Cut-out: Ø70mm  
Recess Depth: 112mm

**FIXED**  
Cut-out: Ø70mm  
Recess Depth Showerproof: 108mm  
Recess Depth Dark light: 123mm

Please note that these drawings are not to scale

### DRIVER NOT INCLUDED.

**CAUTION:** Care should be taken with positioning of the light fitting as it will become hot in operation.

### General Information:

A highly energy efficient and maintenance free adjustable or fixed LED downlight, it provides the equivalent illumination as 50-75w low voltage halogen downlight for approximately a fourth of the power consumption. It has a small and very thin trim and low glare optic thanks to its frosted glass and the fact that the LEDs are set higher above the bezel (dark light – black insert). The fitting integrates a heat sink for thermal stability and maximum life expectancy (50,000 hours). A fixed IP65 rated (showerproof) version is available.

### Downlight options:

- Adjustable Dark Light IP20
- Fixed Dark Light IP20
- Fixed Dark Light Showerproof IP65
- Fixed Showerproof IP65

### Lamp Options:

- 700mA, 13.9w LED (12x LEDs cluster)
- 1000mA, 20.4w LED (12x LEDs cluster)

### Lamp Colour Options:

- Warm white (3000K)
- Neutral white (4000K)
- Cool white (6500K)

### Optics Options:

- 24° beam angle (spot)
- 70° beam angle (flood)

### Driver Options:

- Non dimmable
- Trailing edge dimmable
- 1-10v dimmable
- Emergency lighting pack

### Glass/Diffuser Options:

- Frosted optical glass

### Finishes:

- Matt White (standard)
- Matt Black
- Matt Silver
- Antique Bronze
- Anodised Aluminium
- Polished Chrome
- Polished Brass

### Accessories:

- Plug and Play wiring looms 1.5m (2 to 6 way)
- Link extenders (2m, 5m, 10m)
- Honeycomb louvre
- Colour filters